



TYPICAL SECTION

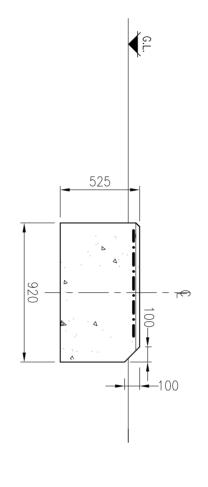

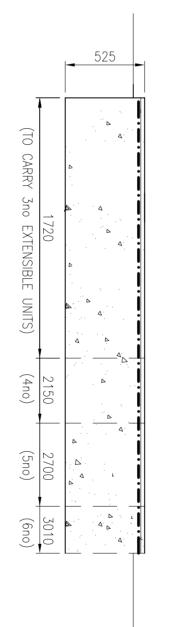

FRONT ELEVATION

SITE NOTES

- 1. CONTRACTOR TO OBTAIN UNDERGROUND CABLE & SERVICE RECORDS PRIOR TO COMMENCEMENT OF ANY WORKS.

 2. THE CONTRACTOR MUST ASSUME THAT ANY EXISTING CABLES LOCATED WITHIN THE WORKS ARE LIVE AND LIAISE WITH THE ELECTRICITY NORTHWEST ENGINEER FOR ADVICE.

 3. SITE SPECIFIC RISK ASSESSMENT TO BE UNDERTAKEN PRIOR TO COMMENCEMENT OF ANY WORKS.

 4. FOUNDATION DESIGN HAS BEEN BASED ON A SUITABLE BEARING PRESSURE FOR MOST GROUND CONDITIONS INCLUDING CLAYS. FORMATION LEVEL FOR FOUNDATIONS TO BE TAKEN DOWN TO GROUND THAT IS SUFFICIENTLY FIRM TO PROVIDE PHYSICAL SUPPORT TO THE STRUCTURE.

 5. FOUNDATION FORMATION LEVELS TO BE INSPECTED AND APPROVED PRIOR TO FOUNDATION

 CONSTRUCTION.

GENERAL NOTES

≥ ∴

3.

- DO NOT SCALE.
 ALL DIMENSIONS ARE IN MILLIMETRES UNLESS
 NOTED OTHERWISE.
 THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ELECTRICITY NORTHWEST CODE OF PRACTICE ES352
 ALL WORK TO CARRIED OUT IN ACCORDANCE
 WITH CURRENT BUILDING REGULATIONS AND RELEVANT BRITISH STANDARDS AND CODES OF PRACTICE.

 CONCRETE TO BE STRENGTH CLASS C32/40 TO BS8500

5

FREDERICK ROAD, SALFORD M6 6QH M6 6QH TEL 0161 6041370 CIVIL DISTRIBUTION SUBSTATION

PLINTH FOR RINGMASTER
EXTENSIBLE SWITCHGEAR

P.F.R. NO. - DWC OTTO