

**electricity**  
**north west**

Bringing energy to your door



# Policy Newsletter

## November 2023

Peter Twomey

Stay connected...



[www.enwl.co.uk](http://www.enwl.co.uk)

# Policy updates – Major Policy Updates



Ref	Issue	Title
CP420 Pt1 Ch19	Prelims I21 Ch19 I3	Policy and Practice for Wood Pole Overhead Lines
CP606 Section B B01	8	Operations Manual
CP606 Section G G18	10	Operations Manual
CP606 Section S S09, S14 and S44	S09 – I8 S14 – I7 S44 - I9	Operations Manual
ES400A4	2	Auditing of Live Line Working


# Policy updates – Minor Policy Updates



Ref	Issue	Title
CP411Pt1N	Various per chapter	LV Cable Jointing Manual
CP421-3	8	Maintenance and Refurbishment of Overhead Lines – LV Services and Murals

# Major policy updates



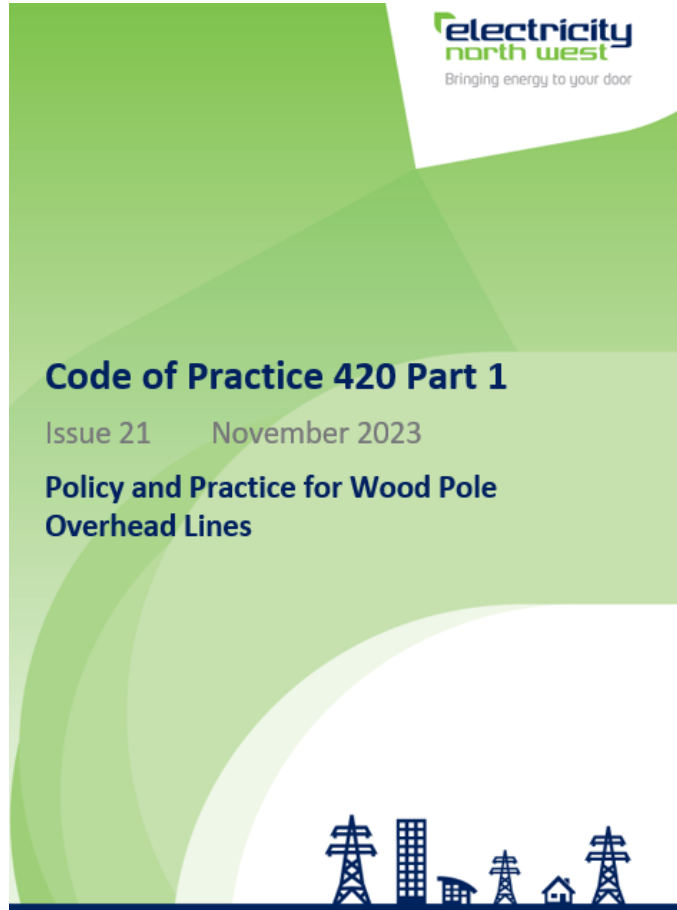

Ch 19 – Control of Vegetation adjacent to overhead lines.

Aligned with CP606 A10 covering live line work.

- Justification for live line work
- Criteria for justification
- Safety distances
- General requirements for work
- Categorisation of work



## **B01 – Cable Indications**

- Updated to cover HV cables running at LV



## **S09 – switchgear labels**

- minor cross reference error corrected

## **S14 – Earthing – Approved Equipment and Procedures**

- clarification added for earthing requirements for transformers

## **S44 – Automatic switching by ARS and C2C**

- complete procedure update for FLISR.
- Reference to C2C removed
- Requirement to disable FLISR for field control added



## 1 Scope/Application

This procedure covers the data submission requirements and amendment procedures for updating the Operational Systems used in ENWL.

## 2 Safety Information

	<b>WARNING:</b> Use Live Work Techniques/Procedures/PPE for those activities carried out on or near equipment that could be live.
	Work Shall be carried out in accordance with General Requirements in Section 1. Approved mandatory PPE and work wear Shall be in accordance with General Requirements in Section 1. Additional Approved PPE and work wear required to complete this task are specified below.
	The task covered by this procedure has significant hazards associated with it identified by the symbol and text <b>WARNING:</b> This procedure details the risk control measures that Shall be applied when carrying out the task. If the risk control measures in this procedure are implemented the risks will be controlled. This procedure also forms the method statement for the task.

## 3 Preliminary Operations

Refer to Section 1 of this manual.

**NOTE:** The meaning of all bold capitalized words used in the body text of this procedure are as set out in the Electricity North West - Distribution Safety Rules, 2013 edition, Section 2, Definitions

## 4 General

Data Management are responsible for ensuring that work to connect, re-connect or disconnect apparatus from the Electricity Network recorded in an accurate and timely manner to ensure that our asset records are maintained in good condition to support the safe operation of the network and ongoing management of the both assets and the network as a whole, and that we can fulfil our obligations to maintain network records.

There is an absolute requirement for Engineers working on the system to provide accurate System Amendment data sheets at the times specified within the procedure, to enable the network model to accurately represent the operational network.

## G18 System Amendment Procedure

- References to CHiME added
- Exceptions for the need to submit pre-laid info including temporary generation, Weezaps and Rezaps.
- Pre-laid information required where the amendment involves the commissioning of additional telemetry when the electrical equipment is commissioned (Including smart devices such as ReLink, Perch or Weezaps)





- Changes to risk assessment considerations
- Experience requirement for inspectors changed
- References to CP423 Live Line Technique updated



# Minor policy updates





## **CP411 Pt1 LV Cable Jointing Manual**

- All statements removed regarding leaving Denso Taped temporary joints on the network for no longer than 24hrs.

## **CP421-3 Maintenance and Refurbishment of Overhead Lines – LV Services and Murals**

- Removed CP420 Pt1 Chapter 23 throughout as this has been archived.